

DESCRIPTION


- ammo::lyser II eco: monitors $\text{NH}_4\text{-N}$ and temperature
- ammo::lyser III eco+pH additionally monitors pH
- ammo::lyser III eco+ $\text{NO}_3\text{-N}$ additionally monitors $\text{NO}_3\text{-N}$
- ammo::lyser III eco+ Cl^- additionally monitors chloride
- ammo::lyser IV eco+pH+ $\text{NO}_3\text{-N}$ additionally monitors pH and $\text{NO}_3\text{-N}$
- ammo::lyser VI eco+pH+ Cl^- additionally monitors pH and chloride

FEATURES

- s::can plug and measure
- Measuring principle: ISE (ion-selective electrodes) without potassium compensation
- Multiparameter probe
- Long-term stable, factory precalibrated
- Minimal maintenance, automatic cleaning with compressed air
- Unique, non-porous / non-leaking reference electrode for technically unrivalled and consistent performance
- ISE refurbishment - the easy way to minimize maintenance
- Easy and quick mounting and measurement directly in the media (InSitu) or in a flow cell (monitoring station)
- Automatic temperature compensation and pH compensation possible
- Ideal for surface water, ground water, drinking water and wastewater
- Lifetime of ISE: typically 6 months (for applications $<1\text{mg/l NH}_4\text{-N}$), resp. 1 to 2 years (for applications $>1\text{mg/l NH}_4\text{-N}$)
- Plug connection or fixed cable

RECOMMENDED ACCESSORIES

Part Number	Article Name
B-44	Cleaning valve
B-44-2	
C-210-sensor	10 m connection cable for s::can physical and ISE probes
F-11-oxi-ammo	Carrier oxi::lyser / soli::lyser / s::can ISE probes
F-48-ammo	ammo::lyser flow-cell (by-pass setup), PVC
D-330-xxx	con::cube V3
D-320-xxx	con::lyte

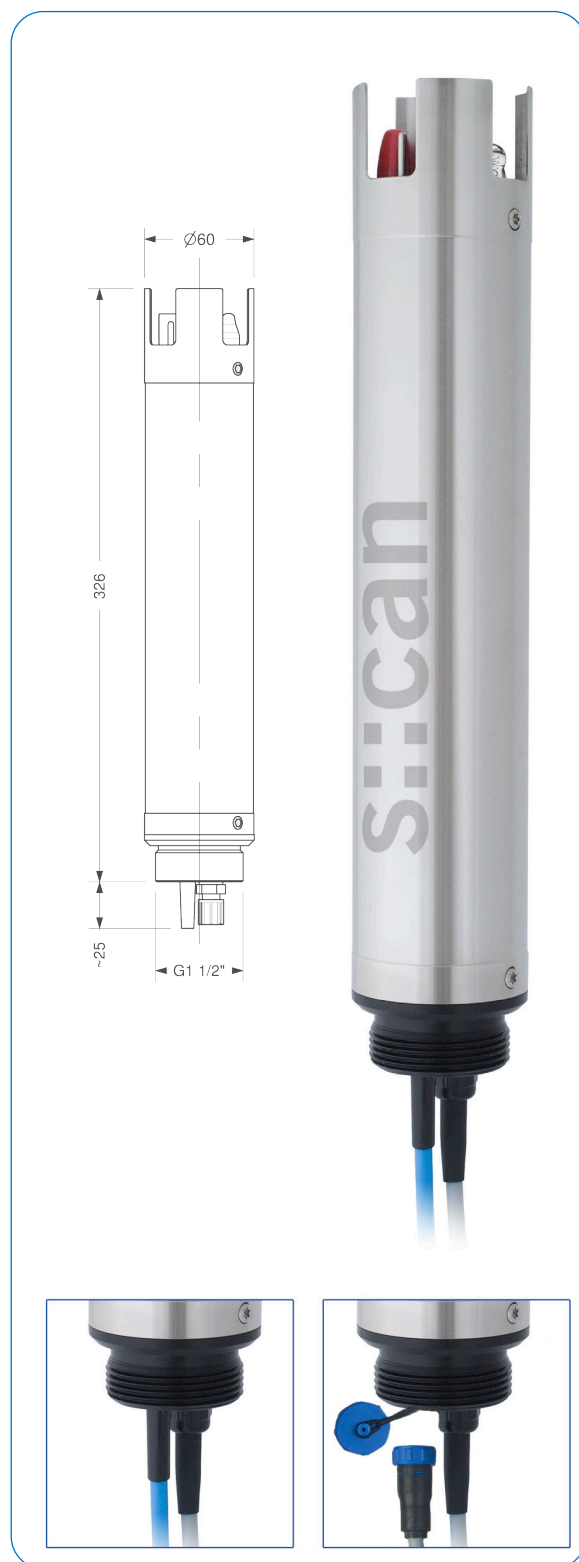

TECHNICAL SPECIFICATIONS

Measuring Principle	ISE	Weight (min.)	2.7 kg
Measuring Principle Detail	NH4-N: ionophore membrane pH: non-porous reference electrode NO3-N: ionophore membrane Cl-: ionophore membrane	Dimensions (Ø × l)	60 × 326 mm
Resolution	NH4-N, K, NO3-N, Cl, F: 0.01 at 0.02–19.99 mg/l 0.1 at 20.0–99.9 mg/l 1 at 100–1000 mg/l T: 0.1 °C	Operating Temperature	0 to 60 °C
Accuracy (Standard Solution)	NH4-N: ± 3% or ± 0.5mg/l* (*whichever is greater)	Operating Pressure	0–1 bar
Automatic Compensation Cross Sensitivities	E-532-eco-xxx: temp E-532-eco-pH-xxx: temp, pH E-532-eco-NO3-N-xxx: temp E-532-eco-NO3-N-pH-xxx: temp, pH E-532-eco-CL-xxx: temp E-532-eco-CL-pH-xxx: temp, pH	Installation / Mounting	Submersed or in a flow cell
Precalibrated Ex-works	All parameters	Process Connection	Bayonet
Response Time (T90)	0–60 sec.	Flow Velocity	0.01 m/s (min.), 3 m/s (max.)
Integration Via	con::lyte con::nect	Automatic Cleaning	Media: compressed air Permissible pressure: 2–4 bar
Power Supply	10–30V DC	Storage Temperature (Electrode)	2 to 40 °C
Power Consumption (Typical)	0.72 W	Storage Temperature (Sensor)	2 to 40 °C
Interface to s::can Terminals	Sys plug (IP67), RS485	Conformity - EMC	EN 50081-1, EN 50082-1, EN 60555-2, EN 60555-3
Cable Length	7.5 m fixed cable (-075) or plug connection (-000)	Conformity - Safety	EN 61010-1
Cable Type	PU jacket	Protection Class (-000)	IP67
Housing Material	Stainless steel 1.4571, POM-C	Protection Class (-075)	IP68

MEASURING RANGE

		Parameter				
		NH4-N [mg/l]	NO3-N [mg/l]	pH [pH]	Temperature [°C]	Part Number
ammo::lyser II eco (NH4-N, temp)	min.	0.1	—	—	0	E-532-ECO-000 / -075
	max.	1000	—	—	60	
ammo::lyser III eco+Cl- (NH4-N, temp, Cl-)	min.	0.1	0.3	—	0	E-532-ECO-NO3-N-000 / -075
	max.	1000	1000	—	60	
ammo::lyser III eco+NO3-N (NH4-N, temp, NO3-N)	min.	0.1	—	2	0	E-532-ECO-PH-000 / -075
	max.	1000	—	12	60	
ammo::lyser III eco+pH (NH4-N, temp, pH)	min.	0.1	0.3	2	0	E-532-ECO-NO3-N-pH-000 / -075
	max.	1000	1000	12	60	

Trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2026 Badger Meter, Inc. All rights reserved.